

Permobil

# Heavy duty products



**permobil**



## Permobil M300 Corpus® HD

The M300 Corpus HD takes all the things you love about Permobil's mid-wheel drive and amplifies them. Outfitted with stronger actuators, more powerful motors, and a reinforced Corpus seating system, it's built to withstand the rigours of an active heavy duty lifestyle. Designed specifically for users up to 204 kg, the suspension has been strengthened to provide you with more stability and completed with elegant features like fully adjustable legrests and up to four power seat functions.




### Specifications

<b>Max user weight</b>	204 kg
<b>Max speed</b>	8 km/h
<b>Range</b>	32.2 km*
<b>Base width</b>	26"
<b>Base length</b>	38"
<b>Seat-to-floor height</b>	18", 19", 20" (elevator) 18", 19", 20" (fixed)
<b>Base turning radius</b>	22"
<b>Ground clearance</b>	3"
<b>Recommended battery type</b>	Group 34 or 24
<b>Weight including batteries</b>	193 kg (Group 34) 202 kg (Group 24)
<b>Drive electronics</b>	R-Net 120A

<b>Optional seat elevator</b>	8"
<b>Tilt options</b>	Posterior: 0° – 45°
<b>Backrest angle - power recline</b>	85° – 150°
<b>Legrest angle - power</b>	85° – 175°
<b>Seat depth</b>	19" – 25" (by 1" incr.)
<b>Seat width</b>	19", 21", 23", 25"
<b>Backrest height</b>	21", 24" – 29" (by 1" incr.)

\* Actual driving range will vary based on driving and battery conditions.  
All specifications may vary based upon configuration.  
Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

### Color options

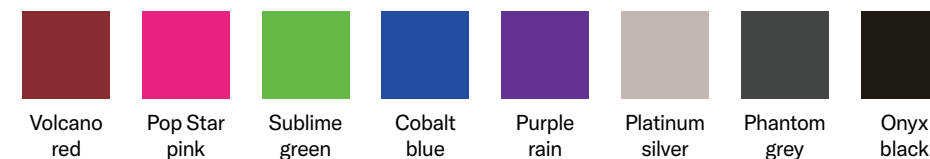

# Permobil M3 Corpus

Meticulously engineered to help you maintain better positioning, feel more secure and reduce driving fatigue so you can conquer daily activities with ease. Its compact base offers maneuverability in tight spaces without sacrificing performance. Featuring the innovative FlexLink suspension geometry with independent caster swing-arms helping to keep you stable and in control as you traverse the obstacles in your world at up to 10 km/h.



## Specifications

<b>Max user weight</b>	150 kg
<b>Max speed</b>	10 km/h
<b>Range</b>	32.2 km*
<b>Base width</b>	24"
<b>Base length</b>	35.5"
<b>Seat-to-floor height</b>	17.5", 18.5", 19.5"
<b>Base turning radius</b>	20.5"
<b>Ground clearance</b>	3"
<b>Recommended battery type</b>	Group 34 or 24
<b>Weight including batteries</b>	175 kg (Group 34) 185 kg (Group 24)
<b>Drive electronics</b>	R-Net 120A
<b>Optional seat elevator</b>	12"


<b>Tilt options</b>	Posterior: 0° – 50° ActiveReach: 5°, 10° & 20° (up to 136 kg)
<b>Backrest angle - power recline</b>	85° – 180°
<b>Legrest angle - power</b>	85° – 180°
<b>Seat depth</b>	14" – 22" (1" incr.)
<b>Seat width</b>	17" – 23" (2" incr.)
<b>Backrest height</b>	20", 23" – 28" (1" incr.)

\* Actual driving range will vary based on driving and battery conditions. All specifications may vary based upon configuration. Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

## Colour options



## Premium options



# Permobil M5 Corpus

Take control with high-performance motors enabling a top speed of 10 km/h and exceptional low-end torque that lets you pivot like a pro. Experience unsurpassed stability and ride comfort with FlexLink Pro independent drive wheel suspension. The M5 Corpus will take you to new heights with increased stability and full suspension in seat elevation.

Up to 14" of ActiveHeight™ & 20° of ActiveReach™

Base width: 25"  
Base length: 37.5"



Weight capacity— 150 kg

## Specifications

Max user weight	150 kg
Max speed	10 km/h
Range	32.2 km*
Base width	25"
Base length	37.5"
Seat-to-floor height	17.5", 18.5", 19.5"
Base turning radius	21.5"
Ground clearance	3"
Recommended battery type	Group 24
Weight including batteries	192 kg
Drive electronics	R-Net 120A
Optional seat elevator	14"

Tilt options	Posterior: 0° – 50°
	ActiveReach: 5°, 10° & 20° (up to 136 kg)

Backrest angle - power recline	85° – 180°
Legrest angle - power	85° – 180°
Seat depth	14" – 22" (1" incr.)
Seat width	17" – 23" (2" incr.)
Backrest height	20", 23" – 28" (1" incr.)

\* Actual driving range will vary based on driving and battery conditions.  
All specifications may vary based upon configuration.  
Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

## Colour options



Chili Sunset Canary Spring Aqua Sky Violet Flamingo Arctic Midnight Gold Platinum Bronze

## Premium options



# Permobil F3 Corpus

The F3 Corpus with a 10 km/h top-end speed features optimised battery weight distribution, lower centre of mass, and fully adjustable ComfortRide suspension that improve stability while traversing inclines or declines. Experience the enhanced functionality that combines outstanding chassis performance with Permobil's industry-leading Corpus seating system.



## Specifications

<b>Max user weight</b>	150 kg	<b>Drive electronics</b>	R-Net 120A
<b>Max speed</b>	10 km/h 8 km/h	<b>Optional seat elevator</b>	12"
<b>Range</b>	32.2 km*	<b>Tilt options</b>	Posterior: 0° – 50° ActiveReach: 5°, 10°, 20° & 30°
<b>Base width</b>	24"	<b>Backrest angle - power recline</b>	85° – 180°
<b>Base length</b>	40" with support wheels 36" without support wheels	<b>Legrest angle - power</b>	85° – 180°
<b>Seat-to-floor height</b>	17.5", 18.5", 19.5"	<b>Seat depth</b>	14" – 22" (1" incr.)
<b>Base turning radius</b>	26.5"	<b>Seat width</b>	17" – 23" (2" incr.)
<b>Ground clearance</b>	3"	<b>Backrest height</b>	20", 23" – 28" (1" incr.)
<b>Recommended battery type</b>	Group 34 or 24	* Actual driving range will vary based on driving and battery conditions. All specifications may vary based upon configuration. Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.	
<b>Weight including batteries</b>	175 kg (Group 34) 184 kg (Group 24)		


## Colour options



## Premium options

# Permobil F5 Corpus

Power meets performance on the F5 Corpus with a 10 km/h top-end speed and upgraded ComfortRide Pro suspension. All-wheel independent, fully adjustable, oil dampened shocks provide the ultimate in ride comfort and reduced vibration while driving in all seat positions, including an unprecedented 14" ActiveHeight seat elevation. Climb and reach higher with increased obstacle negotiation, exceptional motor torque, and enhanced stability allowing up to 45° of ActiveReach forward tilt functionality.

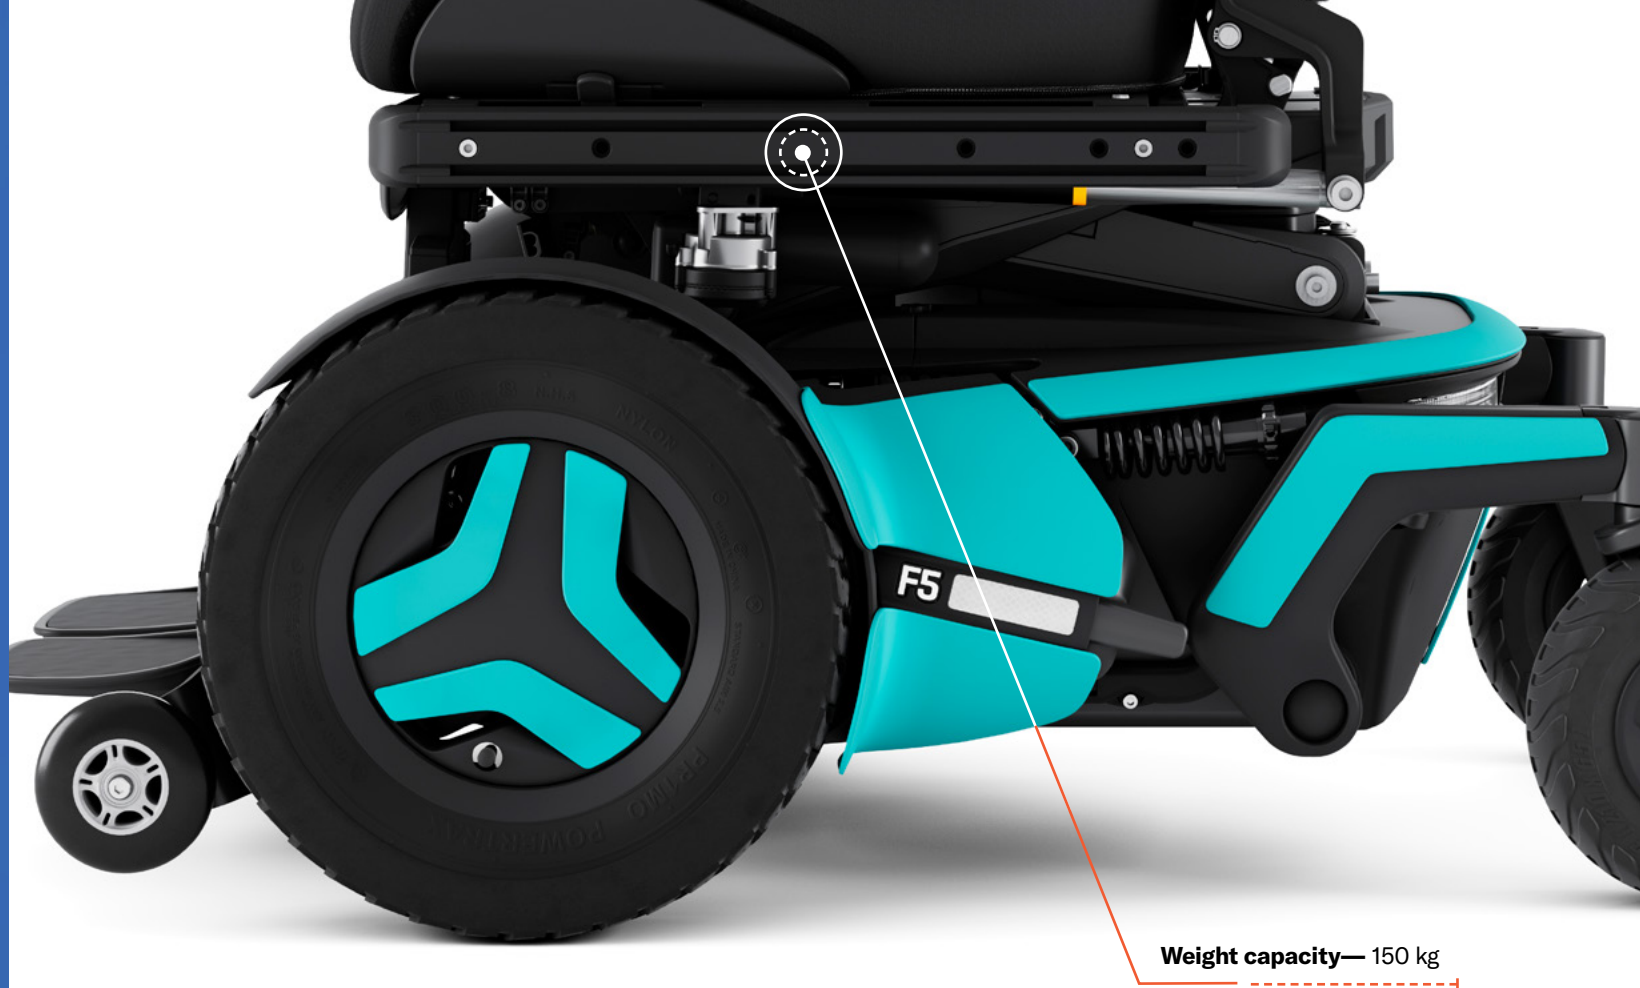


## Specifications

<b>Max user weight</b>	150 kg
<b>Max speed</b>	10 km/h
<b>Range</b>	32.2 km*
<b>Base width</b>	25.5"
<b>Base length</b>	42" with support wheels 38" without support wheels
<b>Seat-to-floor height</b>	17.5", 18.5", 19.5"
<b>Base turning radius</b>	30"
<b>Ground clearance</b>	3"
<b>Recommended battery type</b>	Group 24
<b>Weight including batteries</b>	186 kg
<b>Drive electronics</b>	R-Net 120A
<b>Optional seat elevator</b>	14"

<b>Tilt options</b>	Posterior: 0° – 50° ActiveReach: 5°, 10°, 20°, & 45°
<b>Backrest angle - power recline</b>	85° – 180°
<b>Legrest angle - power</b>	85° – 180°
<b>Seat depth</b>	14" – 22" (1" incr.)
<b>Seat width</b>	17" – 23" (2" incr.)
<b>Backrest height</b>	20", 23" – 28" (1" incr.)


\* Actual driving range will vary based on driving and battery conditions. All specifications may vary based upon configuration. Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

## Colour options



Chili Sunset Canary Spring Aqua Sky Violet Flamingo Arctic Midnight

## Premium options



Gold Platinum Bronze

# TiLite Aero T

Our most advanced aluminium chair is uniquely modelled and handmade to each user's specifications. The dual-tube frame of the Aero T provides superior rigidity, while minimising weight and maximising performance. Thanks to the TiFit process, you get an optimised fit plus adjustability that meets your needs.



Note: The ROHO® AGILITY Active Carbon back supports up to 120 kg.




## Specifications

<b>Max user weight</b>	120 kg standard 159 kg heavy duty	<b>Camber</b>	0°, 2°, 4°, or 6°
<b>Frame features</b>	Titanium dual-tube rigid, TiFit, full adjustability	<b>Center of gravity adjustment</b>	5"
<b>Total chair width*</b>	23"	<b>Front seat width (seat taper)</b>	0", 1", 2", 3"
<b>Seat width</b>	12" – 20"	<b>Precision lock folding seat back</b>	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
<b>Seat depth</b>	12" – 20"	<b>Ergonomic seat</b>	6", 7", 8"
<b>Front seat height</b>	15" – 21"	<b>Transit options</b>	Transport Bracket
<b>Rear seat height</b>	13" – 20"	<b>Transport weight*</b>	5.4 kg
<b>Front frame angle</b>	70°, 75°, 80°, 85°, or 90°	<b>Warranty</b>	Five years on frame One year on TiLite components

\*Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


## Frame colours

### High gloss paint




TiLite red Neon pink High gloss black

### Candy paint




Ruby red Azure blue Electric plum

### Metallic paint



Tangerine metallic Acid green metallic Ocean blue metallic

### Matte textured paint




Flame orange OD green Hyper blue

### Matte paint



Titanium grey Black lava Midnight blue pearl


### Pearlescent paint



White pearl

## Component colours


### Anodised



Red Orange Gold



Green Blue Purple



Black



# TiLite TRA

With the power and style of its titanium dual-tube frame, plus TiFit precision for an exact fit, the TRA provides performance and adjustability made just for you.




















Weight capacity— 159 kg

## Specifications








<b>Max user weight</b>	120 kg standard 159 kg heavy duty	<b>Camber</b>	0°, 2°, 4°, or 6°
<b>Frame features</b>	Titanium dual-tube rigid, TiFit, full adjustability	<b>Center of gravity adjustment</b>	5"
<b>Total chair width*</b>	23"	<b>Front seat width (seat taper)</b>	0", 1", 2", 3"
<b>Seat width</b>	12" – 20"	<b>Precision lock folding seat back</b>	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
<b>Seat depth</b>	12" – 20"	<b>Ergonomic seat</b>	6", 7", 8"
<b>Front seat height</b>	15" – 21"	<b>Transit options</b>	Transport Bracket
<b>Rear seat height</b>	13" – 20"	<b>Transport weight*</b>	5 kg
<b>Front frame angle</b>	70°, 75°, 80°, 85°, or 90°	<b>Warranty</b>	Five years on frame One year on TiLite components

\* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.

## Frame colours

<b>High gloss paint</b>	<b>Candy paint</b>	<b>Metallic paint</b>
 TiLite red	 Neon pink	 High gloss black
 Ruby red	 Azure blue	 Electric plum
 Tangerine metallic	 Acid green metallic	 Ocean blue metallic
<b>Matte textured paint</b>	<b>Matte paint</b>	<b>Pearlescent paint</b>
 Flame orange	 OD green	 Hyper blue
 Titanium grey	 Black lava	 Midnight blue pearl
 White pearl	 Satin	

## Component colours

<b>Anodised</b>		
 Red	 Orange	 Gold
 Green	 Blue	 Purple
 Black		

# TiLite ZRA

With full adjustability and a minimalist mono-tube frame, the ZRA dishes out style without boundaries. With its TiFit titanium frame, you have the complete package: strength, style, and the ability to set up and configure your chair just for you.



Weight capacity— 136 kg




## Specifications

<b>Max user weight</b>	120 kg standard 136 kg heavy duty	<b>Camber</b>	0°, 2°, 4°, or 6°
<b>Frame features</b>	Titanium mono-tube rigid, TiFit, full adjustability	<b>Center of gravity adjustment</b>	6"
<b>Total chair width*</b>	23"	<b>Front seat width (seat taper)</b>	0", 1.5", 2.5"
<b>Seat width</b>	10" – 20"	<b>Precision Lock folding seat back</b>	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
<b>Seat depth</b>	10" – 20"	<b>Ergonomic seat</b>	6", 7", 8"
<b>Front seat height</b>	16" – 21"	<b>Transit options</b>	Transit tie-down
<b>Rear seat height</b>	12.5" – 20"	<b>Transport weight*</b>	4.8 kg
<b>Front frame angle</b>	70°, 75°, 80°, 85°, or 90°	<b>Warranty</b>	Five years on frame One year on TiLite components

\*Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


## Frame colours

### High gloss paint




TiLite red Neon pink High gloss black

### Candy paint




Ruby red Azure blue Electric plum

### Metallic paint




Tangerine metallic Acid green metallic Ocean blue metallic

### Matte textured paint




Flame orange OD green Hyper blue

### Matte paint



Titanium grey Black lava Midnight blue pearl

### Pearlescent paint




White pearl Satin

### Natural titanium

## Component colours

### Anodised

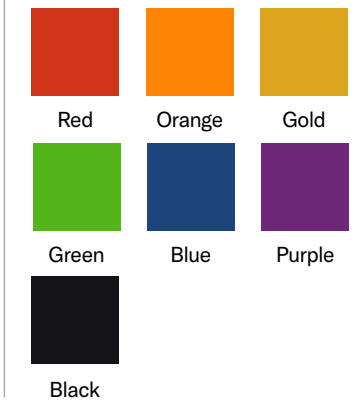

Red Orange Gold  
Green Blue Purple  
Black



## TiLite ZR

With the ZR's minimalist mono-tube frame, less truly is more. The clean aesthetic of the ZR turns heads while the titanium frame makes sure you have the strength and vibration-dampening ride to go with your beauty. Style and strength to take on whatever life throws at you.



Weight capacity— 136 kg


## Specifications

<b>Max user weight</b>	120 kg standard 136 heavy duty	<b>Center of gravity adjustment</b>	2.25"
<b>Frame features</b>	Titanium dual-tube rigid, TiFit, limited adjustability	<b>Front seat width (seat taper)</b>	0", 1.5", 2.5"
<b>Total chair width*</b>	23"	<b>Precision lock folding seat back</b>	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
<b>Seat width</b>	10" – 20"	<b>Fixed seat back</b>	Fixed height: 8" – 20" Fixed angle: 80° – 101°
<b>Seat depth</b>	10" – 20"	<b>Ergonomic seat</b>	4" – 10"
<b>Front seat height</b>	16" – 21"	<b>Transit options</b>	Transport bracket
<b>Rear seat height</b>	12.5" – 20"	<b>Transport weight*</b>	4.2 kg
<b>Front frame angle</b>	70°, 75°, 80°, 85°, or 90°	<b>Warranty</b>	Five years on frame One year on TiLite components
<b>Camber</b>	0°, 2°, 4°, 6°, 8°, or 12°		

\* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


## Frame colours

### High gloss paint




TiLite red Neon pink High gloss black

### Candy paint




Ruby red Azure blue Electric plum

### Metallic paint




Tangerine metallic Acid green metallic Ocean blue metallic

### Matte textured paint




Flame orange OD green Hyper blue

### Matte paint




Titanium grey Black lava Midnight blue pearl

### Pearlescent paint



White pearl Satin


### Natural titanium



Black

## Component colours

### Anodised

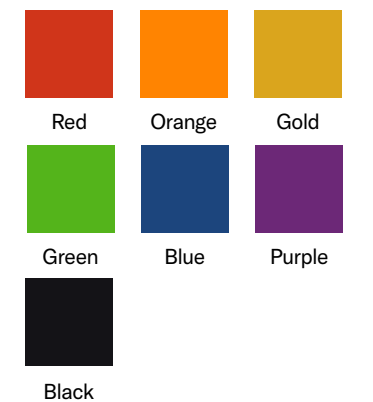

Red Orange Gold  
Green Blue Purple  
Black

# TiLite Aero X

The Aero X features an innovative modular design with clean modern lines and configurability. Featuring multiple configurations that include heavy duty, hemi-height, and amputee options. Add superior rolling dynamics and full adjustability, and you get a chair that excels in both performance and price.




## Specifications

<b>Max user weight</b>	120 kg standard 159 kg heavy duty	<b>Front frame angle</b>	Fixed front: 70°, 80°, or 85° Swing-away: 70°, 80°, or 85°
<b>Frame features</b>	Aluminium box folding frame, modular design, full adjustability	<b>Camber</b>	0°, 2°, 4°, or 6°
<b>Total chair width folded*</b>	10.5"	<b>Center of gravity adjustment</b>	6"
<b>Total chair width*</b>	22.5"	<b>Fixed seat back</b>	Fixed height: 11" – 20"
<b>Seat width</b>	12" – 22"	<b>Transit options</b>	Transit tie-down, transport bracket
<b>Seat depth</b>	12" – 20"	<b>Transport weight*</b>	Fixed front: 7 kg Swing-away: 8.2 kg
<b>Front seat height</b>	13.5" – 21.5"	<b>Warranty</b>	Five years on frame One year on TiLite components
<b>Rear seat height</b>	13" – 20"		

\* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


## Frame colours

### High gloss paint

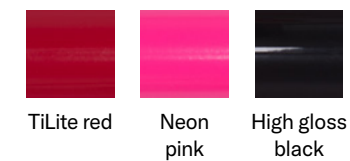


TiLite red Neon pink High gloss black

### Candy paint




Ruby red Azure blue Electric plum

### Metallic paint

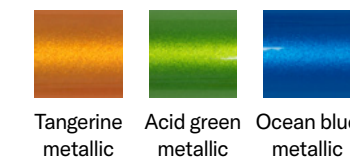


Tangerine metallic Acid green metallic Ocean blue metallic

### Matte textured paint

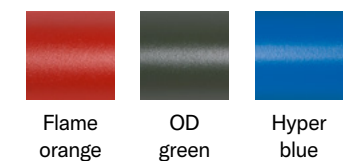

Flame orange OD green Hyper blue

### Matte paint



Titanium grey Black lava Midnight blue pearl

### Pearlescent paint



White pearl



# TiLite 2GX

The TiLite 2GX combines the advantages of a modular folding frame with the high strength and vibration-dampening characteristics of titanium. Add in the Tru-Fit full adjustability that meets your needs and you are ready to roll in a chair designed to empower you.




## Specifications

<b>Max user weight</b>	120 kg standard 159 kg heavy duty	<b>Front frame angle</b>	Fixed front: 70°, 80°, or 85° Swing-away: 70°, 80°, or 85°
<b>Frame features</b>	Titanium box folding frame, modular design, full adjustability	<b>Camber</b>	0°, 2°, 4°, or 6°
<b>Total chair width folded*</b>	10.75"	<b>Center of gravity adjustment</b>	6"
<b>Total chair width*</b>	23"	<b>Fixed seat back</b>	Fixed height: 11" – 20"
<b>Seat width</b>	18" – 22"	<b>Transit options</b>	Transport bracket
<b>Seat depth</b>	16" – 20"	<b>Transport weight*</b>	Fixed front: 5.9 kg Swing-away: 7 kg
<b>Front seat height</b>	13.5" – 21"	<b>Warranty</b>	Five years on frame One year on TiLite components
<b>Rear seat height</b>	13" – 20"		

\* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


## Frame colours

### High gloss paint




TiLite red Neon pink High gloss black

### Candy paint




Ruby red Azure blue Electric plum

### Metallic paint




Tangerine metallic Acid green metallic Ocean blue metallic

### Matte textured paint




Flame orange OD green Hyper blue

### Matte paint



Titanium grey Black lava Midnight blue pearl

### Pearlescent paint



White pearl Satin



## SmartDrive MX2+

SmartDrive's intuitive controls add a power assist for a variety of manual wheelchair scenarios like cruising up hills or over thick carpets. Its lightweight design attaches quickly and its unique OmniWheel design moves with you as you pivot, turn, wheelie, and navigate curbs in style. SmartDrive gives you freedom to do more.



Weight capacity— 150 kg

### Specifications

<b>Max user weight</b>	14 – 150 kg
<b>Product dimensions</b>	Length: 15.3" Width: 5.7" Height: 9.5"
<b>Product weight</b>	6 kg drive unit
<b>Driving range*</b>	19.8 km
<b>Motor power</b>	250 W brushless DC
<b>Maximum speed</b>	8.8 km/h
<b>Operating temp</b>	-25°C – 50°C
<b>Chair type compatibility</b>	Rigid, folding, tilt-in-space, one-arm drive, and others


<b>Drive wheel diameter</b>	22", 24", 25", 26"
<b>Warranty</b>	2-Year limited warranty
<b>Bluetooth® LE</b>	FCC ID QOQBT113 IC ID 5123A-BGTBLE113

*\*Performance measurements will vary based on user and chair characteristics, driving and battery conditions.*

*The SmartDrive has been tested and conforms to all applicable requirements of ANSI/RESNA Standards for Wheelchairs - Volume 1 and Volume 2 and EN 12184.*

*\*\*A wheelchair's specifications provided by its manufacturer may be slightly affected by the addition of the SmartDrive.\*\**

# Cushions & Back Supports

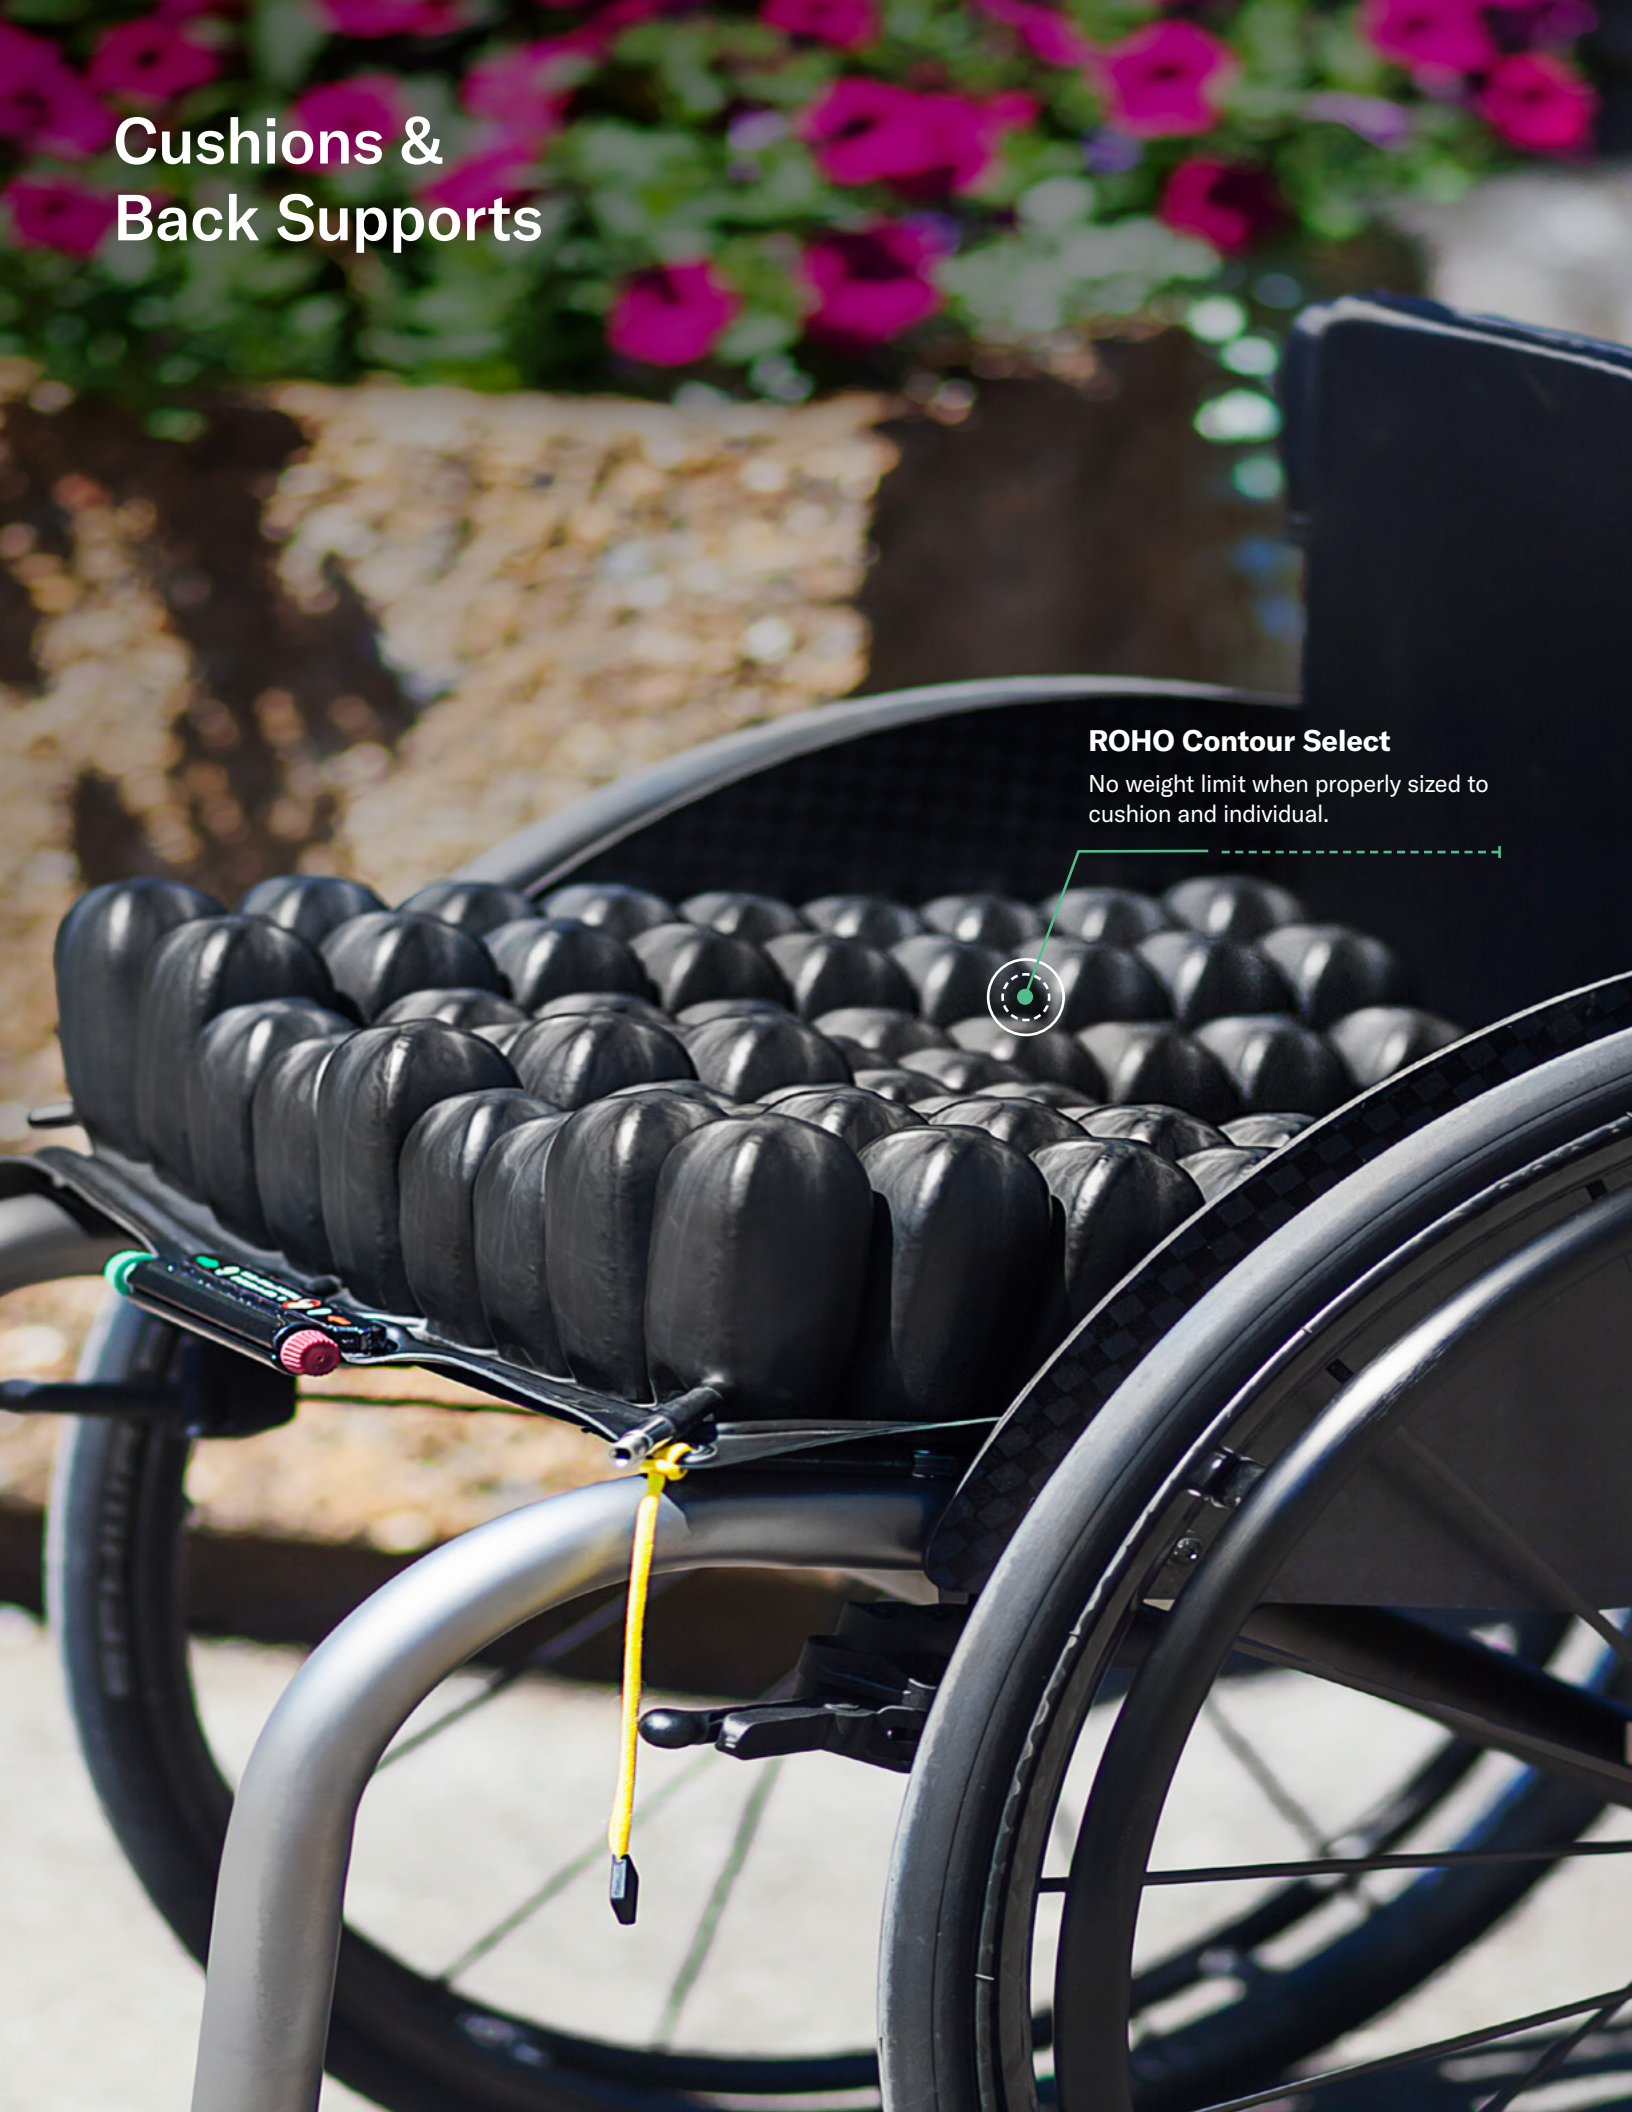

## ROHO Contour Select

No weight limit when properly sized to cushion and individual.



## ROHO® Hybrid Elite® SR® Single Compartment

May require accommodation of pelvic asymmetry, up to approx. 2" / 5 cm  
May require pelvic and lower extremity positioning and a more stable environment for transfers



## ROHO® Hybrid Elite® Dual Compartment Cushion\*

May require correction of pelvic asymmetry (medial lateral), up to approx. 2" / 5 cm  
May require a more stable environment for transfers



## ROHO® Hybrid Select Cushion

May require correction of pelvic asymmetry (medial lateral), up to approx. 1" / 2.5 cm  
May require a more stable environment for transfers

### Ideal for individuals who

### Dimensions

### Weight limit

Min width: 13¾" (35cm)  
Max width: 23¾" (60.5cm)  
Min depth: 14¾" (37.5cm)  
Max depth: 22¾" (58cm)  
Height: 3¼ to 4¼" (8.5 to 11cm)\*

Available up to 227 kg  
\*without load.

Min width: 13¾" (35cm)  
Max width: 23¾" (60.5cm)  
Min depth: 14¾" (37.5cm)  
Max depth: 22¾" (58cm)  
Height: 3¼ to 4¼" (8.5 to 11cm)\*

Available up to 227 kg

Min width: 14" (35.5cm)  
Max width: 20" (51cm)  
Min depth: 14¾" (37.5cm)  
Max depth 20¾" (52.5cm)  
Height: 2¼ to 5½" (5.5 to 13cm)\*

Available up to 227 kg



## ROHO QUADTRO SELECT® HIGH PROFILE® Cushion

May be at risk for or currently have skin/soft tissue breakdown and/or any category/stage pressure injury

### Ideal for individuals who

May require accommodation or correction of medial lateral and/or anterior posterior pelvic asymmetries, up to approx. 3" / 7.5 cm

May require different positioning of the left and right femur

### Dimensions

Min width: 6 cells; 12¾" (32.5cm)  
Max width: 14 cells; 26¼" (67cm)  
Min depth: 6 cells; 11¼" (30cm)  
Max depth: 14 cells; 25½" (65cm)  
Height: 4¼" (10.5cm)

No weight limit on properly sized cushions



## ROHO QUADTRO SELECT® MID PROFILE® Cushion

May be at risk for or currently have skin/soft tissue breakdown and/or any category/stage pressure injury

May require accommodation or correction of medial lateral and/or anterior posterior pelvic asymmetries, up to approx. 2" / 5 cm

May require different positioning of the left and right femur

Min width: 7 cells; 14½" (41cm)  
Max width: 11 cells; 21¼" (54cm)  
Min depth: 7 cells; 13½" (38.5cm)  
Max depth: 11 cells; 20¼" (51.5cm)  
Height: 3¼" (8.5cm)

No weight limit on properly sized cushions



## ROHO CONTOUR SELECT® Cushion

May require accommodation of pelvic asymmetry, up to approx. 1" / 2.5 cm

May need correction of pelvic asymmetry (medial lateral AND anterior posterior)

May require different positioning of the left and right femur

Min width: 7 cells; 14½" (36.5cm)  
Max width: 13 cells; 24½" (62.5cm)  
Min depth: 8 cells; 15¼" (38.5cm)  
Max depth: 12 cells; 22" (56cm)  
Height: 2¼ to 4¼" (5.5 to 10.5cm)\*

No weight limit on properly sized cushions



**ROHO HIGH PROFILE Dual Compartment Cushion**

May be at risk for/or currently have skin/soft tissue breakdown and/or any category/stage pressure injury  
 May require accommodation of pelvic asymmetry, up to approx. 3" / 7.5 cm  
 May require correction of pelvic asymmetry (medial lateral and/or anterior posterior)



**ROHO HIGH PROFILE Single Compartment Cushion**

May be at risk for/or currently have skin/soft tissue breakdown and/or any category/stage pressure injury  
 May require accommodation of pelvic asymmetry, up to approx. 3" / 7.5 cm  
 May require maximum amount of immersion and envelopment



**ROHO MID PROFILE Single Compartment Cushion**

May be at risk for/or currently have skin/soft tissue breakdown and/or any category/stage pressure injury  
 May require accommodation of pelvic asymmetry, up to approx. 2" / 5 cm  
 May require immersion and envelopment

**Ideal for individuals who**

**Dimensions**

**Weight limit**

Min width: 8 cells; 14¾" (37.5cm)  
 Max width: 11 cells; 20" (50.5cm)  
 Min depth: 8 cells; 14¾" (37.5cm)  
 Max depth: 12 cells; 21¼" (55cm)  
 Height: 4¼" (10.5cm)

No weight limit on properly sized cushions

Min width: 6 cells; 11½" (29cm)  
 Max width: 15 cells; 26¾" (68cm)  
 Min depth: 6 cells; 11½" (29cm)  
 Max depth: 14 cells; 25" (63.5cm)  
 Height: 4¼" (10.5cm)

No weight limit on properly sized cushions

Min width: 7 cells; 13¼" (33.5cm)  
 Max width: 11 cells; 20" (50.5cm)  
 Min depth: 7 cells; 13¼" (33.5cm)  
 Max depth: 11 cells; 20" (50.5cm)  
 Height: 3¼" (8.5cm)

No weight limit on properly sized cushions



**ROHO ENHANCER®**

May require accommodation of pelvic asymmetry, up to approx. 1" / 2.5 cm  
 Require positioning of the pelvis and lower extremities  
 May need increased lateral support

**Ideal for individuals who**

**Dimensions**

**Weight limit**

Min width: 8 cells; 14¾" (37.5cm)  
 Max width: 11 cells; 20" (50.5cm)  
 Min depth: 8 cells; 14¾" (37.5cm)  
 Max depth: 11 cells; 20" (50.5cm)  
 Height: 2¼" to 4¼" (5.5 to 10.5cm)\*

No weight limit on properly sized cushions



**Comfort Embrace Cushion**

May need postural alignment  
 May need support to the greater trochanters

Min width: 10" (25.4cm)  
 Max width: 24" (60.1cm)  
 Min depth: 10" (25.4cm)  
 Max depth: 24" (60.1cm)  
 Height: \*Zero Elevation: 4" (10cm) \*Anti-Thrust: 3.75" (9.5cm)

18" / 46 cm = 136 kg  
 20" / 51 cm = 159 kg  
 >22" / 56 cm = 181 kg

\*Dimensions 16"x16" and larger



**Comfort M2 Cushion**

May need coccyx relief  
 May need postural alignment  
 May need support to the greater trochanters

Min width: 10" (25.4cm)  
 Max width: 24" (60.1cm)  
 Min depth: 10" (25.4cm)  
 Max depth: 24" (60.1cm)  
 Height: \*Zero Elevation & wedge: 4.25" (10.8cm) \*Anti-Thrust: 3.75" (9.5cm)

18" / 46 cm = 136 kg  
 20" / 51 cm = 159 kg  
 >22" / 56 cm = 181 kg



**Comfort ACTA-RELIEF® Back Support**

May require a significant amount of postural support  
 Those who have moderate to severe kyphosis  
 May need the maximum amount of trunk support

**Ideal for individuals who**

**Dimensions**

**Weight limit**

Widths: 14" - 20" / 36 cm - 51cm  
 Length: 10" - 22" / 25 cm - 56 cm

14" - 18" / 36 cm - 46cm = 113 kg  
 20" / 51 cm = 136 kg



**Comfort ACTA-EMBRACE® Back Support**

Complex user that truly needs a custom fit

Widths: 10" - 24" / 25 cm - 61cm  
 Length: 10" - 22" / 25 cm - 56 cm

10" - 18" / 25 cm - 46cm = 113 kg  
 20" / 51 cm = 136 kg  
 22" / 56 cm = 159 kg  
 24" / 61 cm = 181 kg



©2022 Permobil. The following are trademarks and registered trademarks of Permobil: ROHO®, Hybrid Elite®, CONTOUR SELECT®, QUADTRO SELECT®, HIGH PROFILE®, MID PROFILE®, ENHANCER®, ACTA-BACK®, ACTA-EMBRACE®.

Permobil has a policy of continual product improvement and reserves the right to amend this document. The current version of this document is available at permobil.com.



**Terry Giles**  
*Custom Fabrication Technician—Power Products*

## Innovating for individuals.

At Permobil we put the people who use our products first. Our purpose is to innovate for individuals; to create advanced assistive solutions that make the lives of people living with disabilities more enriching. Our dedicated teams work tirelessly to make this happen, no matter if they are

designing a new wheelchair, testing seating cushions, or supporting a therapist. Our founders were passionate about providing a better life for people with mobility impairments, and that same passion still flows through everyone at Permobil.